




A

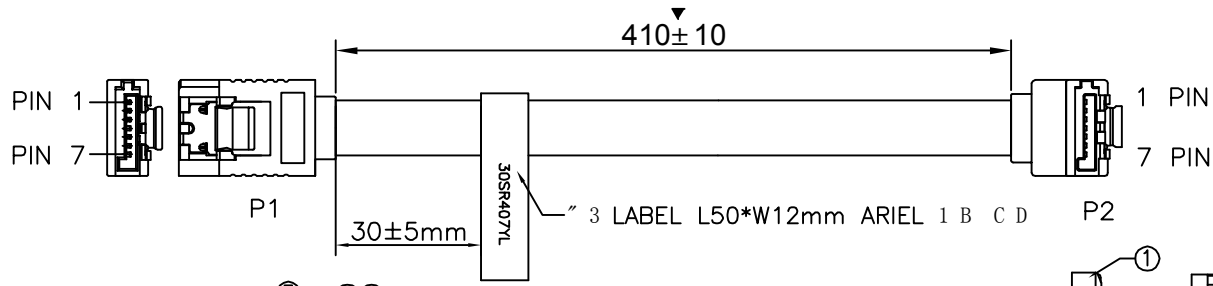

B

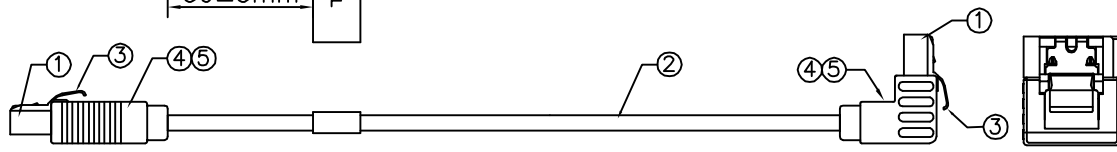

C

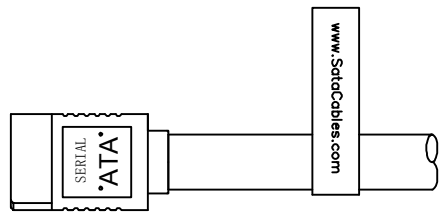

**ELECTRONIC TEST:**


1. ALL CABLE 100% TEST, OPEN, SHORT, MISSWIRE
2. RESISTANCE: 2 ohm max
3. I. RESISTANCE: 10M ohm min
4. HI-POT: 300V DC/10ms
5. DIMENSIONS MARK "▼" SHOULD BE CHECKED;

7P 4INCH  
www.SATACables.com

E119932 AWM 21149 80° 30V VW-1 Serial ATA Cable 30AWG COPARTNER www.SATACables.com

D

⑤	OVER MOLDING	45P PVC COLOR:BLACK CMB06190 CMB05093 OR EQ.	0.0054	Kg
④	INNER MOLDING	35P PVC COLOR:BLACK CMB06170 CMB05092 OR EQ.	0.0046	Kg
③	SATA LATCH	SATA 7P SHORT LATCH	2	pcs
②	SATA CABLE	SERIAL ATA CABLE E119932-T 30AWG OD:2.1*5.7±0.20mm COLOR:YELLOW	360	mm
①	SATA CONN	S-ATA-7P BLACK MOLDING G/F WITH LATCH	2	pcs
NO.	PART NO.	DESCRIPTION	Q'TY	UNIT

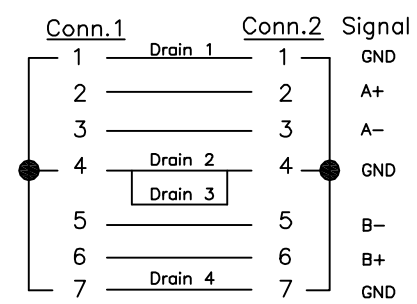

ITEM					7 8			SATA 7P 180-90 30AWG Latch YELLOW		
①					SCALE		DESCRIPTION	3030720128		
②					3 4 5					
③					3 6 5					
				2008.11.03	mm	2+ CMP (NO)	D: \	0 1 PAGE	1/2 ( ) REV (NO)	2.0